



## Ready to Use Ni-MH Rechargeable Battery Low Self Discharge **energyON®**

**AAAA • AAA • AA • C • D • 9V Size; Industrial cells are available.**


- Ready to use, pre-charged and ready to use upon purchase
- Good capacity retention: holds 85% capacity after 12 months when left unused
- High discharge voltage, good for all applications including high drain applications
- Long life cycle, more savings to be replacement of high rate alkaline battery
- Environmentally friendly
- Safe and reliable
- Wide operating temperature



## High Power Ready to Use Ni-MH Rechargeable Battery

Cell Size	Nominal Voltage (V)	Typical Capacity (mAh)	Diameter (mm)	Height (mm)
AAA	1.2	750/800	10.2	44.0
AA	1.2	2000/2100	14.3	50.0
C	1.2	4500	25.5	50.0
D	1.2	9000	32.2	61.0
9V	8.4/9.6	160/200	48.4*26.2*17.4(L*W*H)	

Note: Assorted blister packs for batteries and chargers are available.

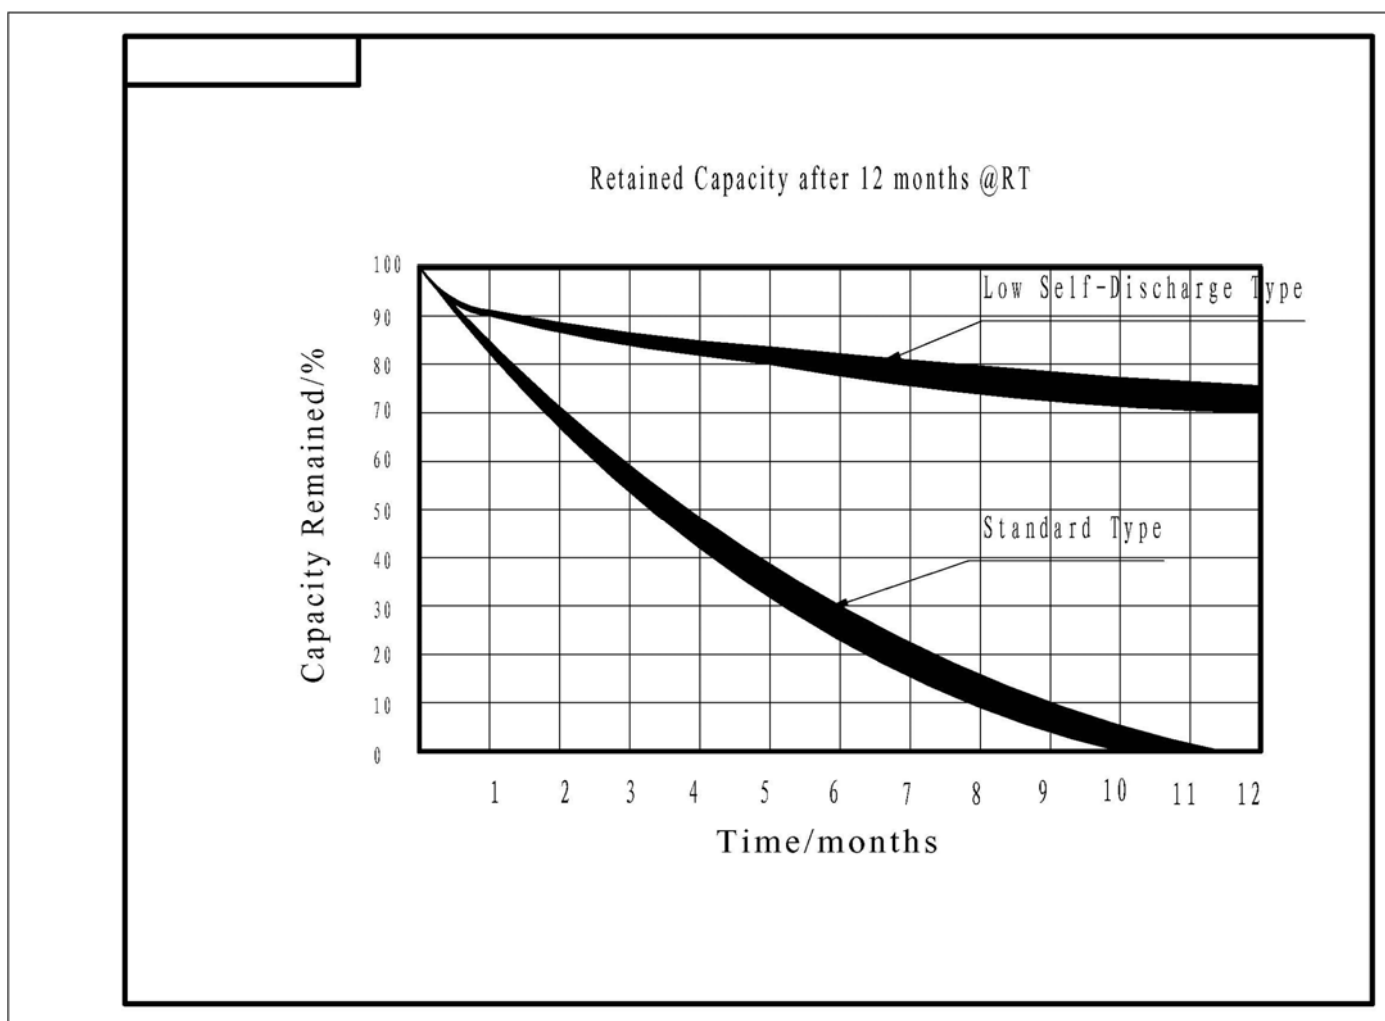

Electrochem Automation (Shanghai) Co., Ltd.  
 No.5788 Huaxia (w) road, Pudong, Shanghai, China  
 Tel: 86-21-3390-6630  
 Fax: 86-21-3390-6902  
 E-mail: sales@nexcellglobal.com

[www.nexcellglobal.com](http://www.nexcellglobal.com)  
 USA Sales & Service Center: Monrovia, CA91016  
 Tel: 626-358-0121  
 Fax: 626-358-5322  
 E-mail: usasales@nexcellglobal.com